



“Gravity Wheel Series Gravity Conveyor”

*For all of your
conveyor needs!*

*Gravity Roller
Gravity Wheel
Line Shaft
Chain Driven Live
Roller
Belt Conveyor
Belt Driven Live Roller
Conveyor Accessories
Electrical Control
-Systems
Sortation Equipment*


**Metzgar Conveyor
Company**

901 Metzgar Drive NW
Comstock Park, MI 49321

Phone: 616-784-0930
Fax: 616-784-4100
Toll Free: 888-266-8390
www.metzgarconveyors.com

E Mail
sales@metzgarconveyors.com

Gravity Wheel Conveyor is an economical solution for gravity conveyor applications. Metzgar Conveyor Company builds wheel conveyor with “Heavy Duty” 5/16 inch diameter axles. Combine straight sections with curves and powered conveyor to meet your material handling needs.

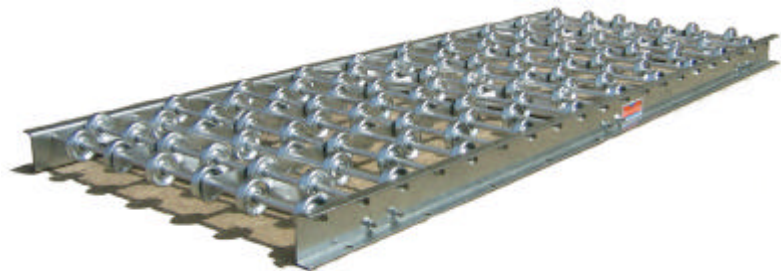

Gravity Wheel Series Specifications

Wheels: 1-15/16” Diameter Steel, Aluminum or Nylo bearing and wheel.
Load rating for steel wheels is 60 lbs.

Aluminum wheels are rated at 50 lbs and NYLO wheels at 20lbs.

Axles: 5/16” headed bolts secured with lock nuts.

The wheel is 13/32” above the top flange of the frame.

Spacers: 0.4375 outside diameter x .035 wall drawn aluminum tubing,
effectively used to maintain strength and insure stable wheel patterns.

Center Band: 12 gauge galvanized or 1/8” aluminum accurately punched to
align holes with the side frame and spaced to give maximum rigidity.

Frame: 12 gauge galvanized formed channel 2-1/2” deep with 15/16” flanges.
Round Axle holes are 5/16” diameter punched on 3” centers.

Frame capacity for steel is 500 pounds with supports on 10 foot centers,
Aluminum frame capacity is 275 pounds with supports on 10 foot centers.

Crossmembers are rigid unitized double bolted design for strength.

Finish: Standard finish is galvanized steel or plain aluminum