



*For all of your
conveyor needs!*

*Gravity Roller
Gravity Wheel
Line Shaft
Chain Driven Live
Roller
Belt Conveyor
Belt Driven Live Roller
Conveyor Accessories
Electrical Control
-Systems
Sortation Equipment*

**Metzgar Conveyor
Company**

901 Metzgar Drive NW
Comstock Park, MI 49321


Phone: 616-784-0930
Fax: 616-784-4100
Toll Free: 888-266-8390

E Mail
sales@metzgarconveyors.com



*“Model MD190 Series
Gravity Roller
Conveyor”*

Medium Duty Gravity Roller Conveyor is an economical solution for gravity applications with medium to large sized products.

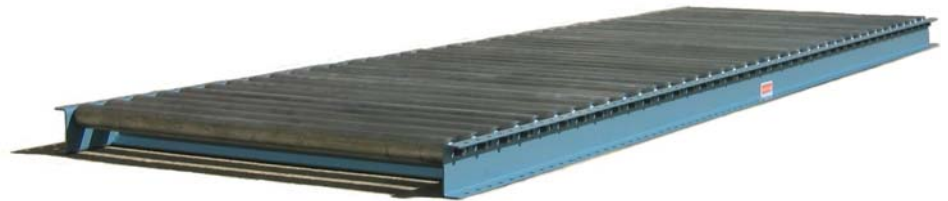

MD190 Gravity Roller Series Specifications

Rollers: 1.9" diameter x 16 gage galvanized Steel with ball bearings.

Load rating for roller is 260 lbs.

Standard Roller Centers are 2 1/4", 3", 4 1/2", 6" and 12"

Axles: Roller axles are 7/16" hex stock spring loaded for easy removal and assembly.

The roller mounting location is 5/16" above the top flange of the frame.

Frame: 10 gage steel formed channel 3-1/2" deep with 1 1/4" flanges.

Axle holes are 7/16" Hex punched on 1 1/2" or 2 1/4" centers.

The Frame capacity with supports on 10 foot centers is 700 pounds. The

Frame capacity with supports on 5 foot centers is 1100 pounds.

Crossmembers 1 1/2" x 1 1/2" x 3/16" structural angle are welded in for strength.

Standard Overall Widths 12", 15", 18", 21", 24", 27", 30", 36", 42" and 48".

Finish: Standard finish for painted components is Metzgar Medium Blue or Vista Green